

FusionLink™ Armored



Ribbon Central Loose Tube Cable for Aerial, Duct and Direct-Buried Applications

Features and Benefits

Compact Design

- Efficient packaging of higher fiber counts
- Lightweight and easy to handle during installation

Easily Removable Ribbon Matrix

- Allows for ease of stripping and fiber breakout
- Improves mid-span strippability

Precision Ribbon Geometry

- Time and labor savings during fiber splicing

Flexible Buffer Tube

- Superior kink resistance
- Increased flexibility
- Facilitates route management in closures
- Eliminates need for closure transportation tubing

Dry Water-Blocking Technology

- Permits rapid cable preparation and termination
- Water-Blocking materials are easily removed

Corrugated Steel Armor

- Provides additional mechanical protection
- Special coating reduces time and effort to remove jacket

Stainless Steel Strength Members

- Corrosion resistant, compact and highly reliable

Performance

- Meets or exceeds the requirements of Telcordia GR-20, Issue 2 and ICEA 640, and is tested in accordance with relevant EIA/TIA-455 series FOTPs for fiber optic cables

Registered Supplier

- ISO 9001, ISO 14001, and TL 9000



FusionLink™ Armored

Bend Radius

Dynamic	20 x Cable OD
Static	10 x Cable OD

Tensile Rating

	N	lbf
Installation	2700	600
Residual	800	180

Crush Resistance

	N/cm	lbf/in
Short Term/Long Term	220/110	125/63


Temperature Ratings

	°C	°F
Operation	-40 to +70	-40 to +158
Installation	-30 to +60	-22 to +140
Storage/Shipping	-40 to +75	-40 to +167

Nominal Design Parameters

Fiber Count	12-72	84-96	108-216	240-432*
Ribbon Count	1-6	7-8	9-18	10-18
Fibers/Ribbon	12	12	12	24
Buffer Tube OD	(mm)	6.2	8.4	11.0
	(inches)	0.24	0.33	0.43
Cable OD	(mm)	12.4	14.6	17.2
	(inches)	0.49	0.57	0.68
Cable Weight	(kg/km)	159	200	263
	(lb/kft)	107	134	176
Max. Length	(m)	12,100	12,100	10,130
	(ft)	39,688	39,688	33,226

Cable Construction

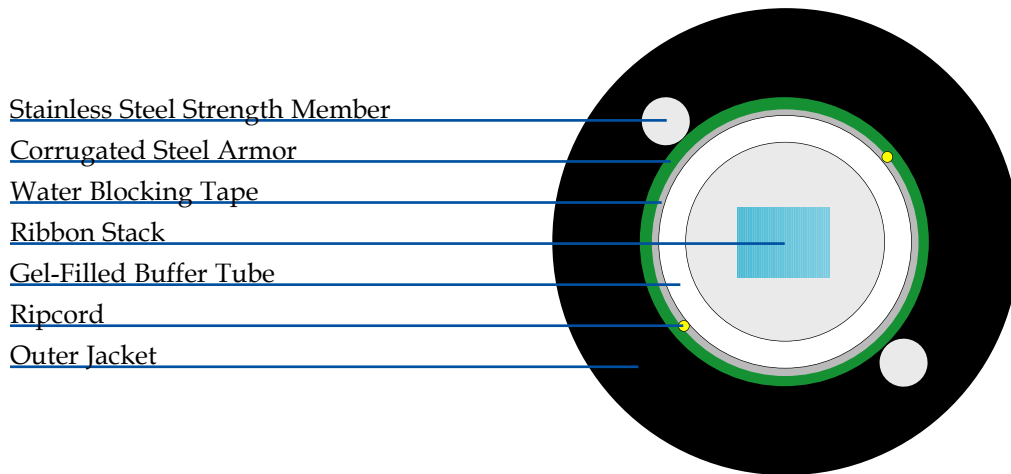

Select a part number according to the fiber count you want:

Fiber Count	1	2	
0012-0216	<input type="checkbox"/>	<input type="checkbox"/>	STRABSAJB
0240-0432	<input type="checkbox"/>	<input type="checkbox"/>	SWRABSAJB*

*Note: This design uses 24 fiber ribbons for counts of 240 or more. Please refer to Ribbon in Loose Tube designs for higher fiber counts using 12 fiber ribbons.

Then, use the following options to complete the part number:

1 Fiber Type	2 Attenuation
S = G.652 Single-Mode	B = 0.35/0.25 dB/km @ 1310/1550 nm
H = G.652(d) Single-Mode Low Water Peak	C = 0.40/0.30 dB/km @ 1310/1550 nm

Note: Please call if you have special requirements for fiber type or attenuation.

Example:

If you need a 96 count armored FusionLink™ cable with Single-Mode fiber and 0.40/0.30 attenuation, order Part Number 0096SCSTRABSAJB.

To place an order please contact us in one of the following ways:

Telephone (800) 669-0808 (Inside Sales)

Fax (800) 951-5040

comm.cables@prysmian.com

