

Mini Figure-8 Drop Cable for Aerial and Duct Applications

Features and Benefits

Easy Access Design

- Optical fiber and messenger are accessible using standard wire strippers
- Optical fiber cable sub-unit easily separates from messenger

Ruggedized Fiber Sub-Unit

- Messenger can be removed without exposing the buffer tube
- Fiber sub-unit has tensile strength independent of the messenger
- Fiber sub-unit can be secured in closures or routed into buildings without the messenger

Stranded Stainless Steel Messenger

- Quick, reliable span terminations with No. 5056 Wirevise
- Corrosion resistant
- Flexible and kink resistant
- Bonding/Grounding is simple and reliable
- Messenger can be used for tone location

Versatile Design

- Small cross-section and high strength provide excellent aerial performance
- Can be pulled through duct
- Compact, separable fiber sub-unit maximizes closure utilization

Highly Flexible

- Easy to coil and store in tight spaces
- Cable is not tightly sprung on the reel and will not unspool itself

Sheath Markings

- Provides positive identification and length verification
- Custom print available

Registered Supplier

- ISO 9001, ISO 14001, and TL 9000



ResiLink™

Bend Radius	mm	inches
Dynamic	172	6.7
Static	86	2.6

Tensile Rating	N	lbf
Maximum Rated Cable Load	2335	525
Maximum Fiber Sub-Unit Tension	134	30

Span Rating*	m	ft
NESC Light Load District	137	450
NESC Medium Load District	76	250
NESC Heavy Load District	46	150

*Minimum 1% installed sag

Temperature Ratings	°C	°F
Operation	-40 to +70	-40 to +158
Installation	-20 to +60	-4 to +140
Storage/Shipping	-40 to +75	-40 to +167

Nominal Design Parameters

Dimensions and Weights

Cable Width	8.5 mm 0.33 in	Fiber Sub-Unit OD	4.4 mm 0.17 in	Messenger Jacket OD	3.7 mm 0.14 in
Cable Weight	55 kg/km 37 lbs/kft	Buffer Tube OD	2.8 mm 0.11 in	Messenger OD	2.4 mm 0.094 in

Package Weights vs. Length


350 m	33 kg	500 m	42 kg	1000 m	69 kg
1150 ft	73 lbs	1640 ft	93 lbs	3281 ft	151 lbs

Packaging*

Reel Diameter	760 mm 30 in	Traverse Width	300 mm 12 in	Max Length	2,000 m 6,560 ft
---------------	-----------------	----------------	-----------------	------------	---------------------

*Note: This reel is not rated for long-term outdoor storage. Consult Prysmian for special packaging requirements.

Cable Construction

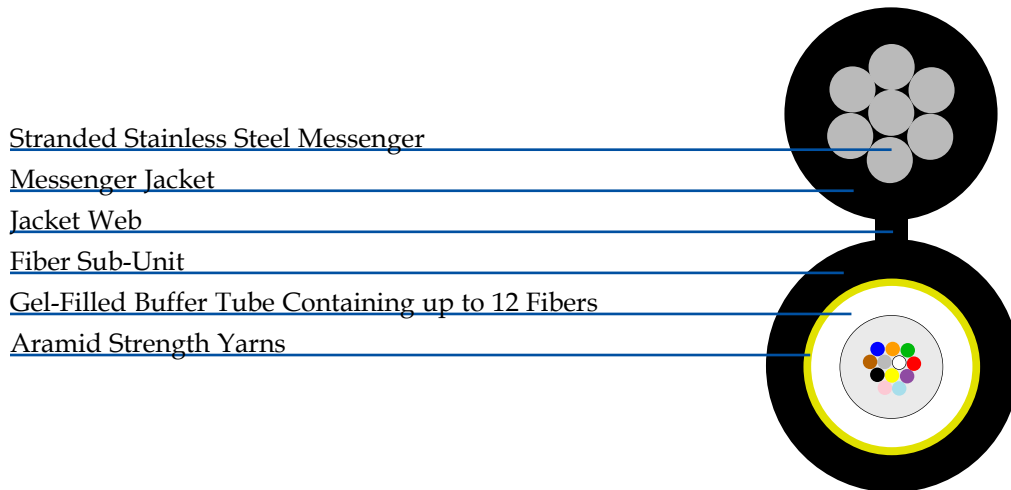

Select a part number according to the fiber count you want:

Fiber Count **1** **2**
 0001-0012 HNLEDJNZK

Then, use the following options to complete the part number:

1 Fiber Type **2** Attenuation
 S = Single-Mode D = 0.40/0.30 dB/km @ 1310/1550 nm
 H = Single-Mode Low Water Peak G.652(d)

Note: Please call if you have special requirements for fiber type or attenuation.

Example:

If you need a 6 count ResiLink™ Cable with Single-Mode fiber with 0.40/0.30 attenuation, order Part Number 0006SDHNLEDJNZK.

To place an order, please contact us in one of the following ways:

Telephone (800) 669-0808 (Inside Sales)
 Fax (800) 951-5040
 comm.cables@prysmian.com

