

Inside Plant

PremisesLink™ Duplex & Quad

For Horizontal Runs, Patch Cords, Jumpers and Pigtails

Features and Benefits

Buffered Fibers

- > High quality buffering offers ease of stripping while maintaining optical performance

Compact Design

- > Small diameter and flexible jackets allow for routing in tight spaces such as panels, cable trays and fiber to the desk applications

Versatile

- > Wide variety of diameters to meet your application needs

Identification

- > Sheath markings provide positive identification and length verification

Variety of Options

- > Single-Mode and multimode versions available
- > 850 nm Laser Optimized 50 μm fiber available
- > Riser (OFNR) and Plenum (OFNP) rated versions available
- > Low smoke versions available
- > Other custom options available

Performance

- > Tested in accordance with GR-409 and ICEA-596
- > Complies with ANSI/EIA/TIA 568B.3
- > The complete cable and all subcomponents are RoHS-compliant

Registered Supplier

- > ISO 9001, ISO 14001, and TL 9000

Performance Specifications

Fiber Count	Cable Diameter (mm)		Tensile Rating-- Installation		Tensile Rating-- Service	
	Riser	Plenum	Riser	Plenum	Riser	Plenum
2	2.9	2.9	220 N (50 lb)	220 N (50 lb)	67 N (15 lb)	67 N (15 lb)
2	4.8	4.8	220 N (50 lb)	220 N (50 lb)	67 N (15 lb)	67 N (15 lb)
2	4.8	4.8	220 N (50 lb)	220 N (50 lb)	67 N (15 lb)	67 N (15 lb)

Temperature Rating	Riser		Plenum	
	-20° to +70° C	-4° to +158° F	-20° to +70° C	-4° to 158° F
Operation	-20° to +70° C	-4° to +158° F	0° to +60° C	32° to 140° F
Installation	-20° to +70° C	-4° to +158° F	-40° to +70° C	-40° to +158° F
Storage/ Shipping	-40° to +70° C	-40° to +158° F	-40° to +70° C	-40° to +158° F


Minimum Bend Radius	Installation (full tension): 20 x Cable Diameter	Service (Service Tension): 10 x Cable Diameter
----------------------------	---	---

CABLE CONSTRUCTION

Flame Retardant Jacket

Tight Buffered Fiber

Aramid Strength Yarns

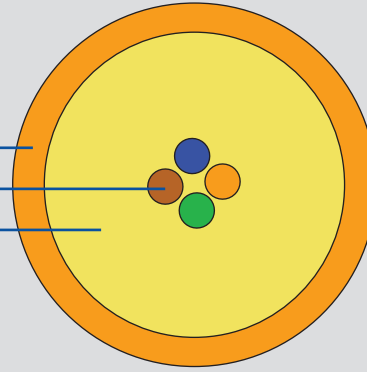

ORDERING INFORMATION

Select a part number according to the following format:

Fiber Count **1** **2** **3** **4** **5** **6**
 0002/0004 HN AH N

Then, use the following options to complete the part number:

1 2	FiberType	Test Wavelengths	Max. Attenuation	MM Bandwidth (MHz*km)	Maximum Link Length (m)
LN	62.5 mm MMF (OM1)	850/1300 nm	3.0/1.0 dB/km	200 (220 RML)/500	300/600 @ 1GbE
LD	Corning InfiniCor® CL1000 62.5 mm MMF (OM1)	850/1300 nm	3.0/1.0 dB/km	385 (RML)/500	500/1000 @ 1GbE
MN	50 mm MMF (OM2)	850/1300 nm	3.0/1.0 dB/km	500/500	600/600 @ 1GbE
MD	Corning ClearCurve® OM2 50 mm MMF	850/1300 nm	3.0/1.0 dB/km	700*/500	150 @ 10GbE (850nm), 750/600 @ 1GbE
TC	Corning ClearCurve® OM3 50 mm MMF	850/1300 nm	3.0/1.0 dB/km	2000*/500	300 @ 10GbE, 1000 @ 1 GbE (850nm only)
TE	Corning ClearCurve® OM4 50 mm MMF	850/1300 nm	3.0/1.0 dB/km	4700*/500	550 @ 10GbE, 1200 @ 1 GbE (850nm only)
HE	Low Water Peak SMF	1310/1383/1550 nm	0.7/0.7/0.7 dB/km	n/a	n/a (consult equipment manufacturer)
ZE	Corning SMF-28e+™	1310/1383/1550 nm	0.7/0.7/0.7 dB/km	n/a	n/a (consult equipment manufacturer)
RH	Corning SMF-28e XB™	1310/1383/1550 nm	0.5/0.5/0.5 dB/km	n/a	n/a (consult equipment manufacturer)

* Effective Modal Bandwidth is characterized by Differential Mode Delay (DMD) measurement per EIA/TIA-455-220.

Note: if you don't see the fiber you need, please refer to the Fiber Code Addendum or contact us.

3 Tight-Buffer OD

S = 600 micron
 T = 900 micron

4 Jacket OD (w/ available Ratings & TB ODs)

H = 2.9 mm (600 micron Duplex Riser only)
 J = 4.8 mm (600 & 900 micron, Riser & Plenum)

5 UL Rating

R = Riser (OFNR)
 P = Plenum (OFNP)
 Z = Riser-Low Smoke (OFNR-LS)

6 Jacket Color

N = Orange
 Y = Yellow
 Q = Aqua

Example:

If you need a PremisesLink™ Riser-Rated Quad cable with a yellow jacket and Single-Mode LWP fiber with 0.7/0.7 dB/km attenuation, order part number 0004HEHNTAHJRNRY.

To place an order, contact us in one of the following ways:

700 Industrial Drive, Lexington SC 29072 - (800) 669-0808 (Inside Sales) - Fax (800) 951-5040 - comm.cables@prysmian.com